


LM6S SERIES LED LIGHT



- The lamp series LM6S is suitable for all types of panels and enclosures, especially where space is at a premium.
- The lamps have a very long service life thanks to the use of LED technology. Two different fixing options provide more flexibility for installation.
- It is suitable for up to 10 lamps to be connected to each other. Daisy-chaining and allows

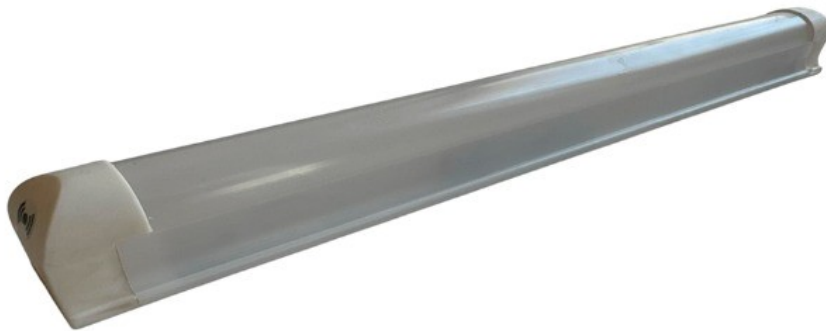

- Magnet or clip fixing
- Dual pressure connection clamp
- Long-lived and maintenance-free by

TECHNICAL DATA



Power consumption	Max. 10 W
Luminous flux	Lm at 120°
Lamp type	LED angle of radiation 120° Light color: daylight, color temperature: 6,000 K to 7,000 K
Service life	50,000 h at +20 °C (+68 °F)
Connection	2 pole cable with socket
Mounting	Magnet fixing or clip fixing
Casing	Plastic and polycarbonate, white
Dimensions	325*36*30 mm
Weight	0,2 kg
Operating/Storage Temperature	-40 to +60 °C (-40 to +140 °F) / -40 to +85 °C (-40 to +185 °F)
Operating/Storage Humidity	Max. 90 % RH (non-condensing)
Protection Type/Protection Class	IP20 / II (double insulated)

OrderCode Magnet Fixing

LM6-325SM
LM10-400SM
LM12-500SM
LM14-600SM

OrderCode Screw Fixing

LM6-325S
LM10-500S
LM12-500S
LM14-600S

Operating Voltage

AC 230 V, 50/60 Hz
AC 230 V, 50/60 Hz
AC 230 V, 50/60 Hz
AC 230 V, 50/60 Hz

Switch

Ultrasonic Sensor
Ultrasonic Sensor
Ultrasonic Sensor
Ultrasonic Sensor