


LM6 SERIES LED LIGHT



- The lamp series LM6 is suitable for all types of panels and enclosures, especially where space is at a premium.
- The lamps have a very long service life thanks to the use of LED technology. Two different fixing options provide more flexibility for installation.
- It is suitable for up to 10 lamps to be connected to each other. Daisy-chaining and allows

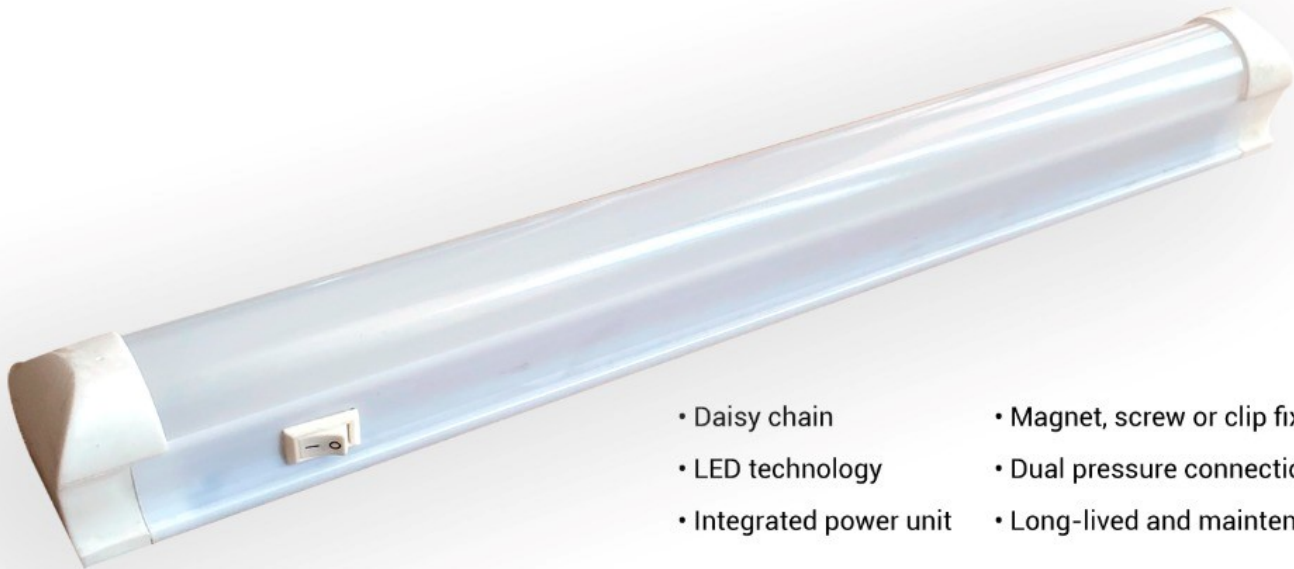

- Daisy chain
- LED technology
- Integrated power unit
- Magnet, screw or clip fixing
- Dual pressure connection clamp
- Long-lived and maintenance-free by

TECHNICAL DATA



Power consumption	Max. 7 W		
Luminous flux	1000 Lm at 120°		
Lamp type	LED angle of radiation 120° Light color: daylight, color temperature: 4,000 K to 7,000 K		
Service life	50,000 h at +20 °C (+68 °F)		
Connection	2 pole cable with socket		
Mounting	Magnet fixing or clip fixing		
Casing	Plastic and polycarbonate, white		
Dimensions	326*36*30 mm		
Weight	0,2 kg		
Operating/Storage Temperature	-40 to +60 °C (-40 to +140 °F) / -40 to +85 °C (-40 to +185 °F)		
Operating/Storage Humidity	Max. 90 % RH (non-condensing)		
Protection Type/Protection Class	IP20 / II (double insulated)		
OrderCode Magnet Fixing	OrderCode Screw Fixing	Operating Voltage	Switch
LM6-325AM	LM6-325A	AC 230 V, 50/60 Hz	on/off light switch
LM6-325AM-24DC	LM6-325A-24DC	DC 24V	on/off light switch
LM6-325AM-12DC	LM6-325A-12DC	DC 12V	on/off light switch